



## FIBER OPTIC TEMPERATURE SENSOR

# TS2

### Key Features

- Temperature range: -200°C to +300°C
- Non-conductive
- Immunity to RFI, EMI, NMR and microwave radiation
- Resistance to high temperatures
- High accuracy
- Stable and repeatable measurement
- GaAs-based temperature sensor

### Applications

- EMI, RFI and microwave environments
- High voltage environments
- Process monitoring
- Medical applications (MRT)



# FIBER OPTIC TEMPERATURE SENSOR

## TS2

# TECHNICAL SPECIFICATION

Name of sensor	TS2
Temperature range <sup>*2</sup>	-200 °C to +300 °C
Standard deviation <sup>*1</sup>	+/- 0.2 K
Fiber Ø	200 µm
Measurement speed <sup>*3</sup>	up to 10 K/s
Sensor standard lengths	2 m up to 20 m
Connector type	Type: ST Operating range: -40 to 85 °C Material: metal
Signal conditioner	Compatible with all Optocon and Weidmann fiber optic thermometers

## DESCRIPTION

The fiber optic temperature probe TS2 is designed for a wide range of applications, especially for the use inside of generators, power transformers as well as bus bars, R&D and industrial applications and offers immunity to RFI, EMI, NMR and microwave radiation – the best choice for a lot of challenges.


The standard temperature sensor TS2 has a response time of <2s. With a standard deviation\* of +/-0.2 K it allows precise and repeatable measurements. The coating of TS2 temperature sensor is made of PTFE, the fiber tip has a diameter of 1.0mm and has a ST-connector. For mechanical stability and applications e.g. in oil special protective coatings and hoses are available.

The fiber optic probe TS2 consists of a PTFE protected glass fiber and a GaAs-crystal (Galliumarsenid) at the sensor tip. It is totally free of metal and immune to RFI, EMI, NMR and microwave radiation – therefore TS2 probes are explicit suitable for the use in high temperature ranges (-200°C to +300°C) as well as in aggressive and rough test environments.

All fiber optical temperature sensors can be connected to the fiber optic temperature measurement devices (FOTEMP), delivers accurate and complete reliable, stable and repeatable values. Starting at a light wave length of 850nm GaAs becomes optical translucent. Since the position of the band gap is temperature dependent, it shifts about 0.4nm/Kelvin. The sensor cable can be produced in different lengths without influencing the accuracy of the measurement result. Other sensor lengths and connector types are available upon request.

We are always anxious to adjust our offer to your special needs. In case of any further questions about individual measurement problems, lengths of sensors or connector types, please contact us.

## DIMENSIONS

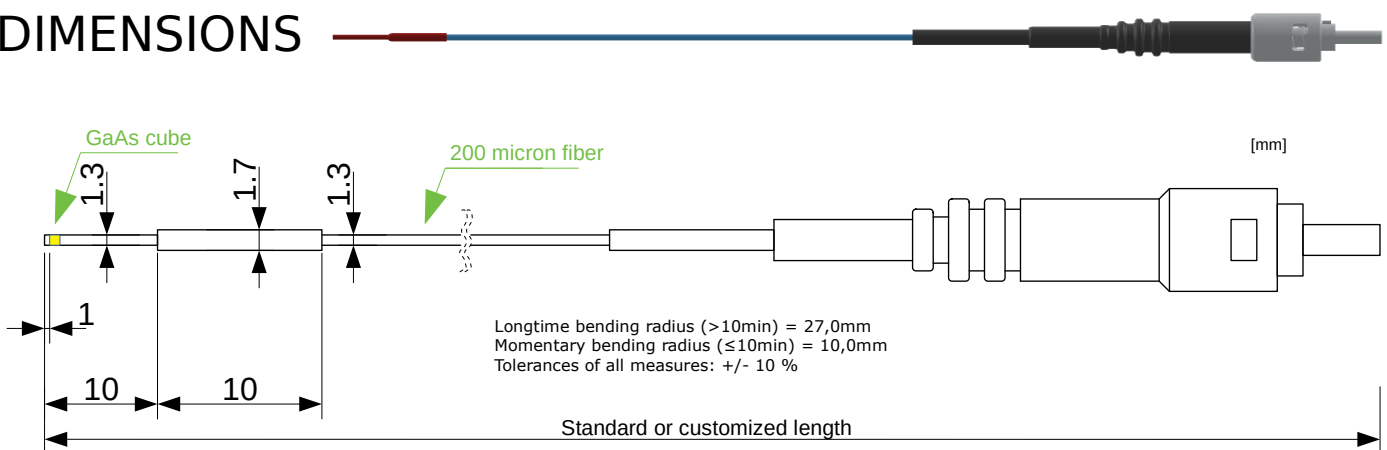

\*1 Statement only possible with analysis unit. See data sheet of the measurement device for information about technical data.  
 \*2 Long-term temperature range -200°C up to +260°C, Short-term temperature range +260°C up to +300°C.  
 \*3 Measurement accuracy, standard deviation and speed depend on calibration range and spreading of calibration points

### DISCLAIMER – PLEASE READ CAREFULLY

This catalogue is based on Weidmann's knowledge as of the date of its publication. Instructions and explanations, while substantially accurate, are non-binding. Illustrations, specifications and average values are subject to change, do not guaranty actual product characteristics or specifications and are intended only to indicate possible uses of the Weidmann products. Customers alone must determine whether the products are suitable for their particular use and intended application and assume all risk and liability for unsafe or improper use or application. Weidmann shall not be liable for catalogue printing or other errors, for changes to Weidmann products or for any defects in the technical data or use of any information contained in the catalogue. Weidmann reserves the right always to revise the catalogue at any time, without notification. No part of this catalogue can form any part of or amend or alter any provision of any contract with respect to the Weidmann products. With respect to products in this catalogue, Weidmann disclaims all warranties, express or implied, including but not limited to, implied warranties of merchantability and fitness for a particular purpose. Weidmann shall not be liable for direct, indirect, special, incidental or consequential damages arising out of the purchase or use of products in this catalogue.